

Perimeter / Underslab



Molded Polystyrene Insulation.

Foam-Control® molded polystyrene insulation with Perform Guard® is a cost-effective, durable, and energy efficient solution for below grade insulation applications. It is an ideal material to stop energy loss at the foundation or slab. Foam-Control insulation with Perform Guard is a proven material with built in protection against the destructive force of termites. Foam-Control insulation is available in thicknesses to meet your local R-5, R-7.5, and R-10 insulation requirements.

- R-value that never changes and is stable over time
- Range of compressive strengths available
- Closed cell insulation with superior moisture resistance
- High drying potential to rapidly release absorbed moisture
- Meets code requirements for continuous insulation

Strength/R-value.

FOAM CONTROL	Compressive Strength ¹ , psi	R-value/inch ²	
		75°F ³	40°F ⁴
150	15	4.2	4.6
250	25	4.4	4.8
400	40	4.4	4.8
600	60	4.5	4.9

¹ Compressive strength @ 10% deformation.

² R-value units are °F-ft²-h/Btu.

³ Recommended for design in WARM climates.

⁴ Recommended for design in COLD climates.

Foam-Control is available in a wide range of R-values and thicknesses to meet your needs. Product thicknesses are provided in the Foam-Control Thickness Selector. Project requirements vary, so Foam-Control can be ordered in any R-value thicknesses to meet your needs.


Proven to meet, or exceed, building codes.

Foam-Control is manufactured under an industry leading quality control program monitored by UL and further recognized in UL Evaluation Report UL ER11812-01. Foam-Control meets ASTM C578, "Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation".



Stands up to the weather.

When tested in accordance with ASTM C1512, "Standard Test Method for Characterizing the Effect of Exposure to Environmental Cycling on Thermal Performance of Insulation Products", Foam-Control maintains its R-value and strength after severe exposure to freeze-thaw cycles.

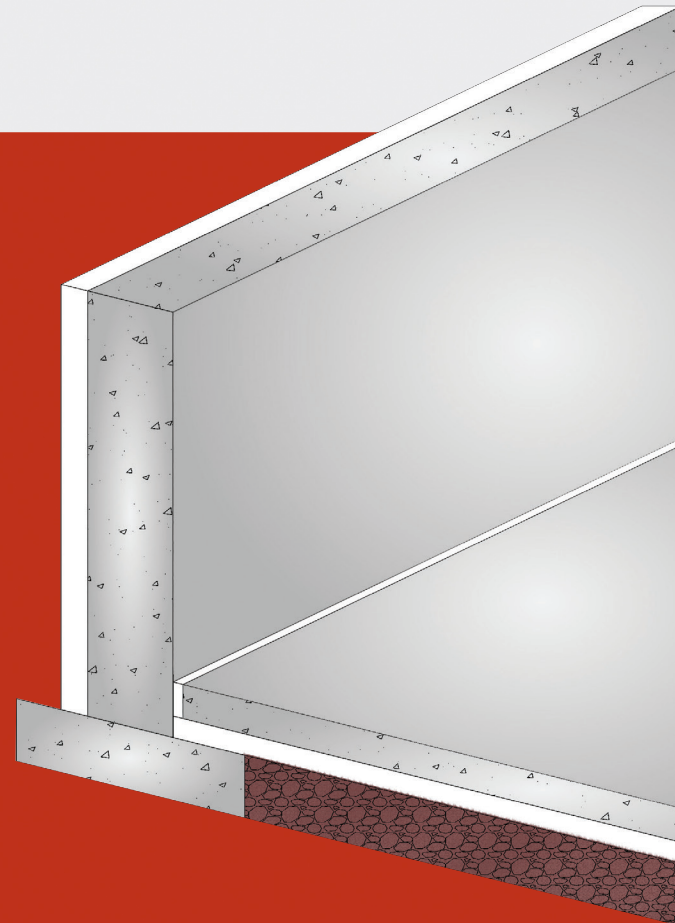

FOAM FACTS:

Foam-Control outperforms XPS.

- Foam-Control provides a stable long-term R-value at a lower cost
- Foam-Control uses a blowing agent with 10 x lower global warming potential and 10,000 x lower ozone depletion
- Foam-Control meets strength requirements at a lower cost
- Foam-Control and XPS have resistance to moisture, but Foam-Control has a higher vapor permeance leading to superior drying potential
- Foam-Control with **Perform Guard**® treatment available to provide termite resistance

Performance Value.

When you consider all performance characteristics and cost, Foam-Control is your best choice for foam insulation.

Foam-Control has air in its closed cells and therefore has a stable R-value. Many other insulations use blowing agents that cause R-value loss and are harmful to the environment.

Foam-Control has compressive strength to meet specific project requirements.

Foam-Control is manufactured to resist moisture absorption in wetting conditions and release absorbed moisture quickly during drying periods, which means Foam-Control maintains R-value.

Termite Resistant - Perform Guard®.

One of the most destructive forces anywhere is termites. Foam-Control can be manufactured with Perform Guard, a proven and safe additive, that effectively resists termites.

Foam-Control with Perform Guard meets ICC ES AC239, "Acceptance Criteria for Termite-Resistant Foam Plastics".

Recyclable.

After its life as a building insulation, Foam-Control is 100% recyclable. It can be ground into granules and reincorporated into new Foam-Control products or it can be thermally processed into a resin that's used to manufacture other new products.

Ready to take control? Start here.

If you're ready to have Foam-Control contribute to your next project, just contact your nearest Foam-Control manufacturer and Technical Sales Representative. They will be happy to give you design consultation, information about Foam-Control products, pricing, and answers to all of your questions.



PACIFIC ALLIED PRODUCTS Ltd.
MADE IN HAWAI'I, FOR HAWAI'I SINCE 1965
CAMPBELL INDUSTRIAL PARK
91-118 KAOMI LOOP KAPOLEI, HAWAII 96707
808-682-2038 888-824-3626
WWW.HAWAIIANFOAMCONSTRUCTION.COM



Foam-Control products are manufactured by AFM Corporation licensees.

Copyright © 2020 AFM Corporation. All rights reserved. Printed in USA. Foam-Control, the Foam-Control logo and Perform Guard are registered trademarks of AFM Corporation, Lakeville, MN.

UL logo is a registered trademark of UL LLC. USGBC logo is a registered trademark of U.S. Green Building Council.

FC05-01/20



www.foam-control.com

**MOLDED
POLYSTYRENE
INSULATION**